


Limited linear motion type

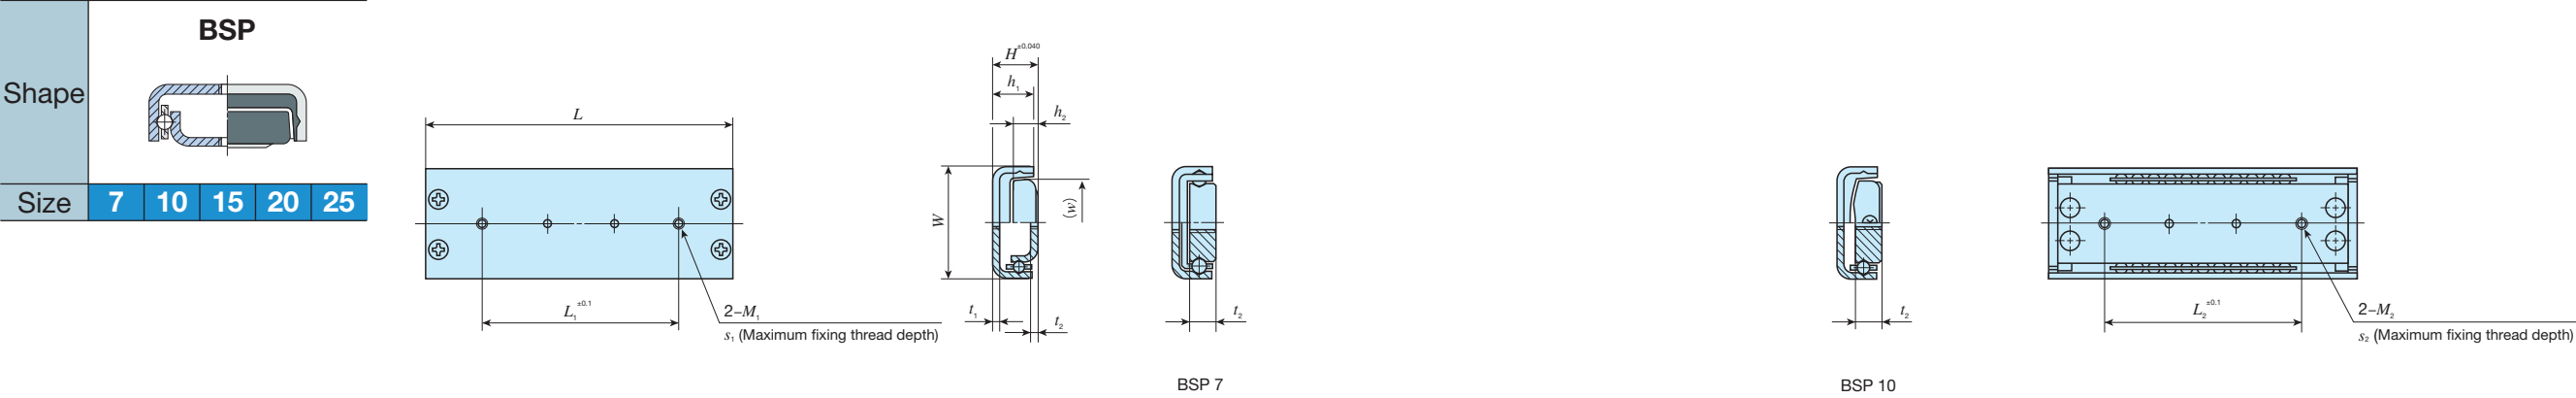

Identification number	Mass (Ref.) g	Nominal dimensions mm				Table mounting dimensions mm						Bed mounting dimensions mm						Basic dynamic load rating C N	Basic static load rating C ₀ N
		W	H	L	Maximum stroke length	L ₁	M ₁	Maximum fixing thread depth s ₁		h ₁	t ₁	w	L ₂	M ₂	Maximum fixing thread depth s ₂	h ₂	t ₂		
BSP 7 15 SL ⁽¹⁾	2.1	7	4	15	9	5	M2	1		3.4	0.9	3.6	5	M2	2	—	2	93.3	42.0
BSP 7 20 SL ⁽¹⁾	2.8			20		10							10					134	70.0
BSP 7 30 SL ⁽¹⁾	4.2			30		20							20					170	98.0
BSP 7 40 SL ⁽¹⁾	5.6			40		30							30					203	126
BSP 10 25 SL	6.2	10	6	25	15	15	M2.6	1.5		5.8	1.1	6.2	15	M2.6	2.7	3.7	2.7	340	156
BSP 10 35 SL	8.8			35	26	25							25					398	194
BSP 10 45 SL	11.3			45	38	35							35					453	233
BSP 15 30 SL	11	15	8	30	22	14	M3	2.5		7	1.2	11.2	14	M3	3	4.5	1.2	395	194
BSP 15 40 SL	14.7			40	24	24							24					550	311
BSP 15 50 SL	18.4			50	32	34							34					644	389
BSP 15 60 SL	22.1			60	40	40							40					732	467
BSP 20 40 SL	23.7	20	10	40	22	24	M3	3.2		9	1.4	16	24	M3	3.5	6.2	1.4	726	386
BSP 20 50 SL	29.7			50	28	34							34					866	496
BSP 20 60 SL	35.7			60	34	40							40					998	606
BSP 20 70 SL	41.7			70	40	45							45					1 120	717
BSP 20 80 SL	47.6			80	53	50							50					1 180	772
BSP 25 50 SL	37.6	25	10	50	26	34	M3	3.5		9	1.6	20.5	34	M3	3	5.7	1.6	866	496
BSP 25 60 SL	45.3			60	32	40							40					998	606
BSP 25 70 SL	52.9			70	40	45							45					1 120	717
BSP 25 80 SL	60.5			80	51	50							50					1 180	772
BSP 25 100 SL	75.8			100	63	60							60					1 410	992

Note ⁽¹⁾ BSP 715 SL through BSP 740 SL cannot be mounted from the inside of the table and bed.